

27 August 2018

Statistics Finland's PX-Web API Help

Through Statistics Finland's PX-Web API interface for statistical databases you can search for machine readable information in, for example, XLSX, CSV, JSON, JSON-stat and PX formats.

Before using the service, you should take a look at [Statistics Sweden's \(SCB\) API documentation](#).

NB. SCB's description is based on the use of a relational database where you do not have to use a PX extension in the table name. By contrast, in Statistics Finland's databases you must always remember to use the PX extension in the table name.

API limitations can be seen in this link <http://pxnet2.stat.fi/PXWeb/api/v1/en/?config>

API's structure

In the newest PX-Web version you can see the structure of the database:

[http://pxnet2.stat.fi/pxweb/api/v1/en/StatFin/?query=*&filter=*](http://pxnet2.stat.fi/pxweb/api/v1/en/StatFin/?query=*&filter=)

API's structure	PXWEB/API-NAME/API-VERSION/LANGUAGE/DATABASE-ID/LEVELS/TABLE-ID
Available databases	http://pxnet2.stat.fi/PXWeb/api/v1/en/
Topics in the StatFin database (levels)	http://pxnet2.stat.fi/PXWeb/api/v1/en/StatFin
Statistics (levels) related to population (vrm)	http://pxnet2.stat.fi/PXWeb/api/v1/en/StatFin/vrm
List of tables	http://pxnet2.stat.fi/PXWeb/api/v1/en/StatFin/vrm/vaerak/
Table metadata	http://pxnet2.stat.fi/PXWeb/api/v1/en/StatFin/vrm/vaerak/statfin_vaerak_pxt_001.px Now a short version of both GET and POST requests can be used: http://pxnet2.stat.fi/PXWeb/api/v1/en/StatFin/statfin_vaerak_pxt_001.px


27 August 2018

PX-Web API

Example:

1. First select the desired table from Statistics Finland's StatFin database.

In this example, a table describing the population by age and sex is selected from the Population structure statistics: **Population by age (1-year) and sex in 1970 to 2017**

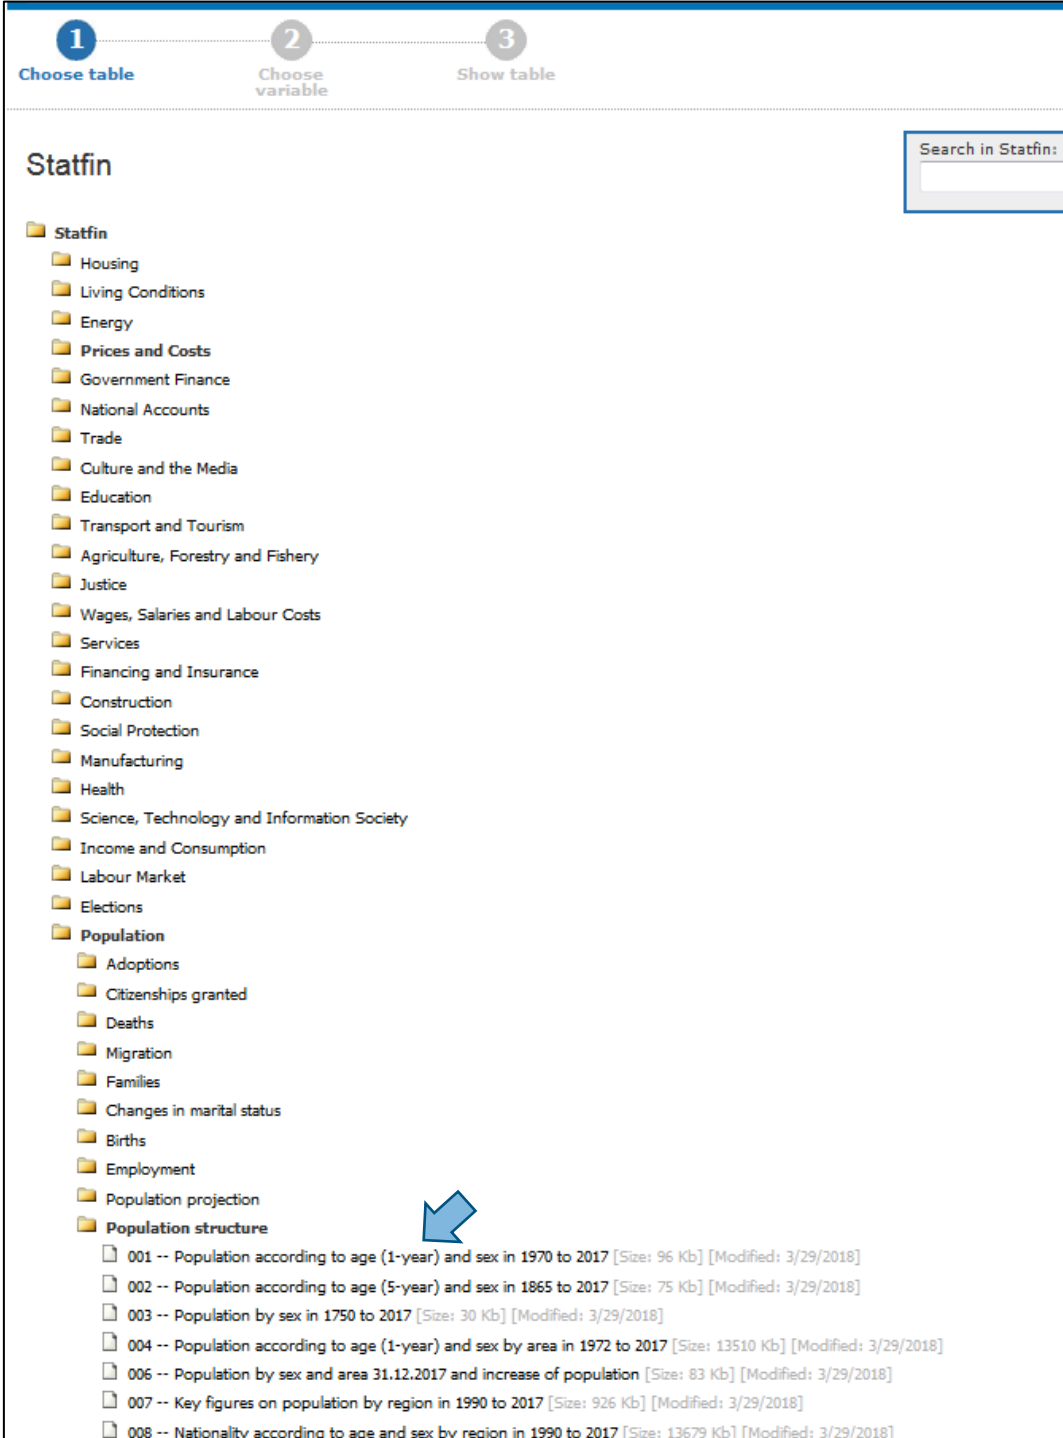


The screenshot shows the StatFin database interface. At the top, there are three numbered steps: 1. Choose table, 2. Choose variable, and 3. Show table. Below this is a search bar labeled 'Search in Statfin:'. The main content is a tree view of categories. The 'Population' category is expanded, showing sub-categories like 'Adoptions', 'Citizenships granted', 'Deaths', 'Migration', 'Families', 'Changes in marital status', 'Births', 'Employment', 'Population projection', and 'Population structure'. Under 'Population structure', there are eight tables listed, with a blue arrow pointing to the first one: '001 -- Population according to age (1-year) and sex in 1970 to 2017 [Size: 96 Kb] [Modified: 3/29/2018]'. Other tables include '002 -- Population according to age (5-year) and sex in 1865 to 2017', '003 -- Population by sex in 1750 to 2017', '004 -- Population according to age (1-year) and sex by area in 1972 to 2017', '006 -- Population by sex and area 31.12.2017 and increase of population', '007 -- Key figures on population by region in 1990 to 2017', and '008 -- Nationality according to age and sex by region in 1990 to 2017'.

27 August 2018

- Next, select the desired variables and click "Continue".

In this table, only the **Year** variable marked with a red asterisk (*) is mandatory. Only select **2017** as at this stage you only need the data form the API interface.

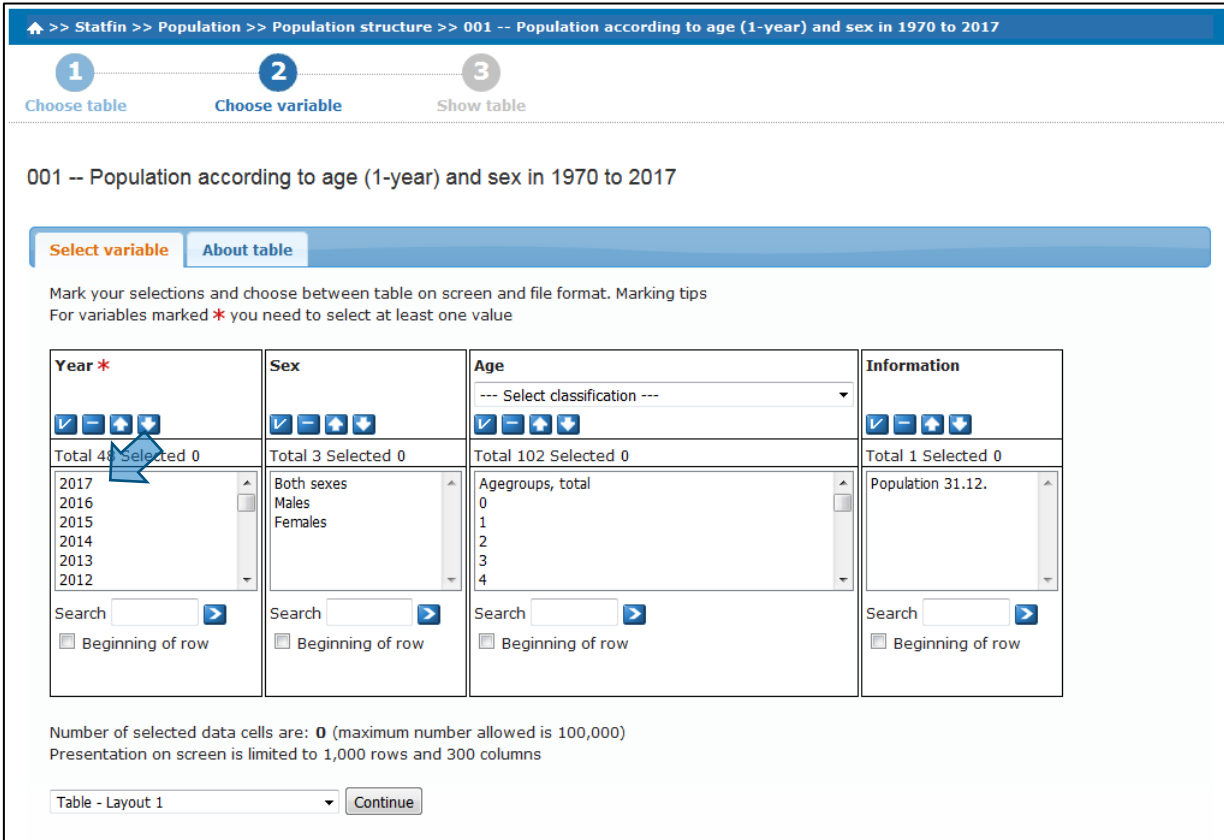

001 -- Population according to age (1-year) and sex in 1970 to 2017

Select variable About table

Mark your selections and choose between table on screen and file format. Marking tips
For variables marked * you need to select at least one value

Year *	Sex	Age	Information
Total 48 Selected 0	Total 3 Selected 0	Total 102 Selected 0	Total 1 Selected 0
2017 2016 2015 2014 2013 2012	Both sexes Males Females	Agegroups, total 0 1 2 3 4	Population 31.12.
Search <input type="text"/> <input type="button" value="▶"/>	Search <input type="text"/> <input type="button" value="▶"/>	Search <input type="text"/> <input type="button" value="▶"/>	Search <input type="text"/> <input type="button" value="▶"/>
<input type="checkbox"/> Beginning of row	<input type="checkbox"/> Beginning of row	<input type="checkbox"/> Beginning of row	<input type="checkbox"/> Beginning of row

Number of selected data cells are: 0 (maximum number allowed is 100,000)
Presentation on screen is limited to 1,000 rows and 300 columns

Table - Layout 1

- After the selection you see the table depicted below. Next, select the **About table** tab which displays table information.




Population 31.12. by Year

2017	5,513,130
------	-----------

27 August 2018

At the bottom of the page you find the **Make this table available in your application** selection surrounded by yellow dashed lines. Click the link and it opens a JSON query.

Information
Unit Persons
Contact Statistics Finland Further information Statistics' home page
Latest update 3/29/2018
Copyright Yes
Source Statistics Finland
Matrix vaerak_001_201700
 Make this table available in your application

27 August 2018

- Here you find the necessary API interface data. You can use the JSON POST query to retrieve data and the GET query to retrieve the metadata of the table. These provide a machine-readable link to the database table.

Matrix
vaerak_001_201700

[Hide information](#)

POST the following JSON query to the URL below to access this table from your application.

URL:

JSON query:

```
{
  "query": [
    {
      "code": "Vuosi",
      "selection": {
        "filter": "item",
        "values": [
          "2017"
        ]
      }
    }
  ],
  "response": {
    "format": "px"
  }
}
```

[More information](#)

Using PX-Web API with RESTClient

The supported formats are: PX, CSV, JSON, XLXS and JSON-stat.

The URL address together with the GET function gives the metadata of the selected PX table. The metadata are also shown when the URL address is typed into the address field of the browser.

When retrieving the information with the GET function of the URL command <http://pxnet2.stat.fi/PXWeb/api/v1/en/StatFin> we find out that the database has 26 **root nodes**.

The URL command GET <http://pxnet2.stat.fi/PXWeb/api/v1/en/StatFin/vrm> shows that the database has 11 **table nodes**.

Below is an image of the POST query result together with the URL command and JSON query code shown in the example.

1	"Year", Population 31.12.
2	"2017", 5513130
3	

27 August 2018

When you remove the time variable from the JSON query code you can see all periods and their values. The image below now shows the table describing the index point figures.

Headers	Response
1	"Year", "Commodity", "January Point figure", "February Point figure", "March Point figure", "April Point figure", "May Point figure", "June Point figure", "July Point figure", "August Point figure", "September Point figure", "October Point figure", "November Point figure", "December Point figure", "Annual Average Point figure"
2	"2015", "0 Consumer Price Index", 99.54, 99.79, 100.12, 100.11, 100.03, 100.03, 99.81, 99.99, 100.13, 100.29, 100.11, 99.99, 100.00
3	"2016", "0 Consumer Price Index", 99.57, 99.70, 100.08, 100.37, 100.34, 100.39, 100.32, 100.37, 100.54, 100.75, 100.77, 101.02, 100.35
4	"2017", "0 Consumer Price Index", 100.41, 100.92, 100.91, 101.22, 101.06, 101.14, 100.85, 101.11, 101.32, 101.30, 101.55, 101.51, 101.10
5	"2018", "0 Consumer Price Index", 101.21, 101.52, 101.73, 101.98, 102.09,
6	

Using filters

Filters can be used to search only for defined values.

- **Item.** The filter lists valid variable values. There can be one or several filtered values, for example, years “2015” and “2016”.
- **All.** This filter uses the wildcard feature but only one of these can be used at a time. For example, 01* shows all values that begin with 01, * shows all values.
- **Top.** Shows the first values or the latest values if the variable is time-based. The number of values to be shown is entered in the value field, for example, “5” which would show the five first or latest values.

Examples:

Population for 2017.

```
{
  "code": "Vuosi",
  "selection": {
    "filter": "item",
    "values": [
      "2017"
    ]
  }
}
```

27 August 2018

If the figures “1980” and “1988” are added to the time variable, the population for 1980 and 1988 are shown in addition to that for 2017.

```
{
  "code": "Vuosi",
  "selection": {
    "filter": "item",
    "values": [
      "2017", "1980", "1988"
    ]
  }
}
```

Select all **Vuosi** variables that end in zero, i.e. Show the populations for 1970, 1980, 1990, 2000 and 2010. Set the value of the **Ikä** variable as “010” so only persons aged 10 are shown for the selected years.

```
{
  "code": "Vuosi",
  "selection": {
    "filter": "all",
    "values": [
      "*0"
    ]
  }
},
{
  "code": "Ikä",
  "selection": {
    "filter": "item",
    "values": [
      "010"
    ]
  }
}
```

27 August 2018

Shows the population of the past three years: 2017, 2016 and 2015. For time-based variables, the newest values are shown first.

```
{
  "code": "Vuosi",
  "selection": {
    "filter": "top",
    "values": [
      "3"
    ]
  }
}
```

This example shows the number of women in the last five years.

```
{
  "code": "Vuosi",
  "selection": {
    "filter": "top",
    "values": [
      "5"
    ]
  }
},
{
  "code": "Sukupuoli",
  "selection": {
    "filter": "item",
    "values": [
      "2"
    ]
  }
}
```


27 August 2018

You can also use a free text search with URL commands through the API interface. For example:

- 1) Search “population”
<http://pxnet2.stat.fi/PXWeb/api/v1/en/StatFin?query=väestö>
- 2) Searches for data related to the population in the “vrm” topic
<http://pxnet2.stat.fi/PXWeb/api/v1/en/StatFin/vrm?query=väestö>

Technical support:

Further information is available by contacting tietokannat@stat.fi.